


# KD802- 12V 3W

- Operating Voltage: 110-230V/50-60Hz
- Qty(pcs): 6
- G.W.(kg): 7.5
- N.W.(Kg): 7
- Ctn(cm): 39x36.5x48

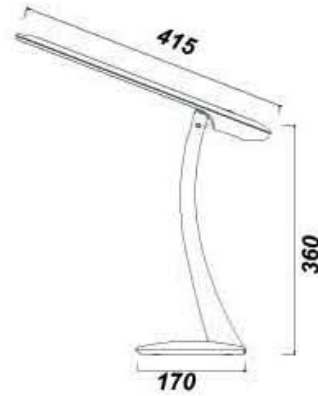

KD802

# BRIGHT-LIGHTING

Tel: 886-4-723-7159

Fax: 886-4-724-6640

<http://m.cens.com/s/brightlight>

# ELECTRIC APPLIANCE CO., LTD.

Founded in 2002, our company Shangyu Bright-lighting Electric Co., Ltd. lies in Lianghu town, Shangyu city. We possess 43000m2 modern workshops, 30 assembly producing lines, advanced inspection equipment and more than 700 staffs. We export 6,000,000 sets of lamps every year.



KD116C

**WL2002**

- Operating Voltage: 110-230V/50-60Hz
- Built-in electronic ballast
- Heat-dissipating T5 LED lamp tube
- 1000-1.100 power cord and plug
- Horizontal position
- Cover transparent or with color

Model	Rated Voltage	Length(mm)	Quantity/ctn	Packaging Size(L)	G.W./kg
WL2002	9W	278x20x43	30	42x27x40	0.7
WL2002	9W	358x20x43	30	42x27x40	0.8
WL2002	13W	348x20x43	30	42x27x40	0.9
WL2002	13W	418x20x43	30	42x27x40	1.0
WL2002	21W	418x20x43	30	42x27x40	1.1
WL2002	28W	418x20x43	30	42x27x40	1.2

WL2001C

**KD802- 12V 3W**

- Operating Voltage: 110-230V/50-60Hz
- Qty(pcs): 6
- G.W.(kg): 7.5
- N.W.(kg): 7
- Carton: 39x36.5x48

KD802