


TSC7 SELF-CLINCHING STANDOFFS

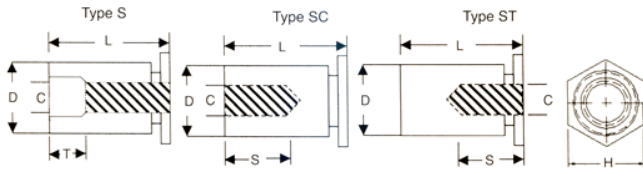

THROUGH THREADS BLIND THREADS THROUGH - HOLE THREADS

DIMENSIONS & SPECIFICATIONS														(MILLIMETERS)				
THREAD SIZE	PART NO.	L LENGTH ± 0.08									+0.08 -0.00	D DIM. +0.00 -0.13	S MIN. THREAD DEPTH	H NOM.	MIN.	MIN.		
		TYPE S			TYPE ST			TYPE SC										
M2.5x0.45	2545	2	3	4	6	8	10	12	14	16	18	19	4.2	4.19	5.2	4.8	0.63	5.8
	2545B												5.4	5.38		5.38	6.4	0.63
M3.0x0.50	350	2	3	4	6	8	10	12	14	16	18	19	4.2	4.19	6.2	4.8	0.63	5.8
	350B												5.4	5.38		5.38	6.4	0.63
M3.5x0.60	356	2	3	4	6	8	10	12	14	16	18	19	5.4	5.38	7.0	6.4	0.63	7.1

DIMENSIONS & SPECIFICATIONS														(INCH)					
THREAD SIZE	PART NO.	L LENGTH ± 0.003												+0.003 -0.000	D DIM. +0.00 -0.005	S MIN. THREAD DEPTH	H NOM.	MIN.	MIN.
		TYPE S				TYPE ST				TYPE SC									
#2-56	256	0.09	0.125	0.187	0.250	0.312	0.375	0.437	0.500	0.562	0.625	0.687	0.750	0.166	0.165	0.200	0.187	0.025	0.23
	256B													0.213	0.212		0.212	0.250	0.025
#4-40	440	0.09	0.125	0.187	0.250	0.312	0.375	0.437	0.500	0.562	0.625	0.687	0.750	0.166	0.165	0.220	0.187	0.025	0.23
	440B													0.213	0.212		0.212	0.250	0.025
#6-32	632	0.09	0.125	0.187	0.250	0.312	0.375	0.437	0.500	0.562	0.625	0.687	0.750	0.213	0.212	0.270	0.250	0.025	0.27