

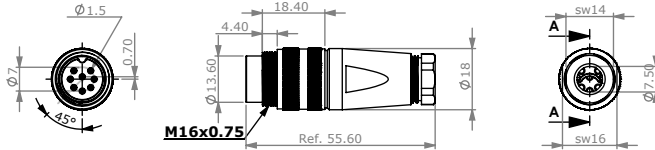


WP160XPA IP67 DIN CABLE PLUG SCREW LOCKING



MATERIAL :

1. HOUSING HOLDER : Zn ALLOY NICKEL PTD.
2. STRAIN BOOT :POM
3. SET SCREW : STEEL NICKEL PTD.
4. SCREW CAP: BRASS NICKEL PTD.
5. SHELL:BRASS NICKEL PTD.
6. CABLE HOLDER : STEEL NICKEL PTD.
7. HOUSING : PA6
8. TERMINALS : BRASS GOLD PTD.

SPECIFICATION :

Rating : 100V AC 5A max.

Contact Resistance :

Pins 30m Ω max.

Shell 50m Ω max.

Insulation Resistance :


100M Ω at 500V DC min.

Protection degree : IP67

Cable outlet : 3~6mm / 6~8mm



WP1603PA



WP1604PA



WP1605APA



WP1605BPA



WP1606PA



WP1607PA



WP1608APA