


Specifications:


| | |
|-----------------------|----------------------|
| No. of Contacts | 4, 6, 8 |
| Withstanding Voltage | AC 300V for a minute |
| Current Rating | 1A |
| Insulation Resistance | MIN. 1000Mohm |
| Contact Resistance | MAX. 30mohm |



- Note 1. The contact arrangement shown here is the front view of the connector
 2. For regular used the voltage should be less than 30V AC or 42V DC.
 3. The insulation resistance value is measured at DC100V.



Mechanical drawing:

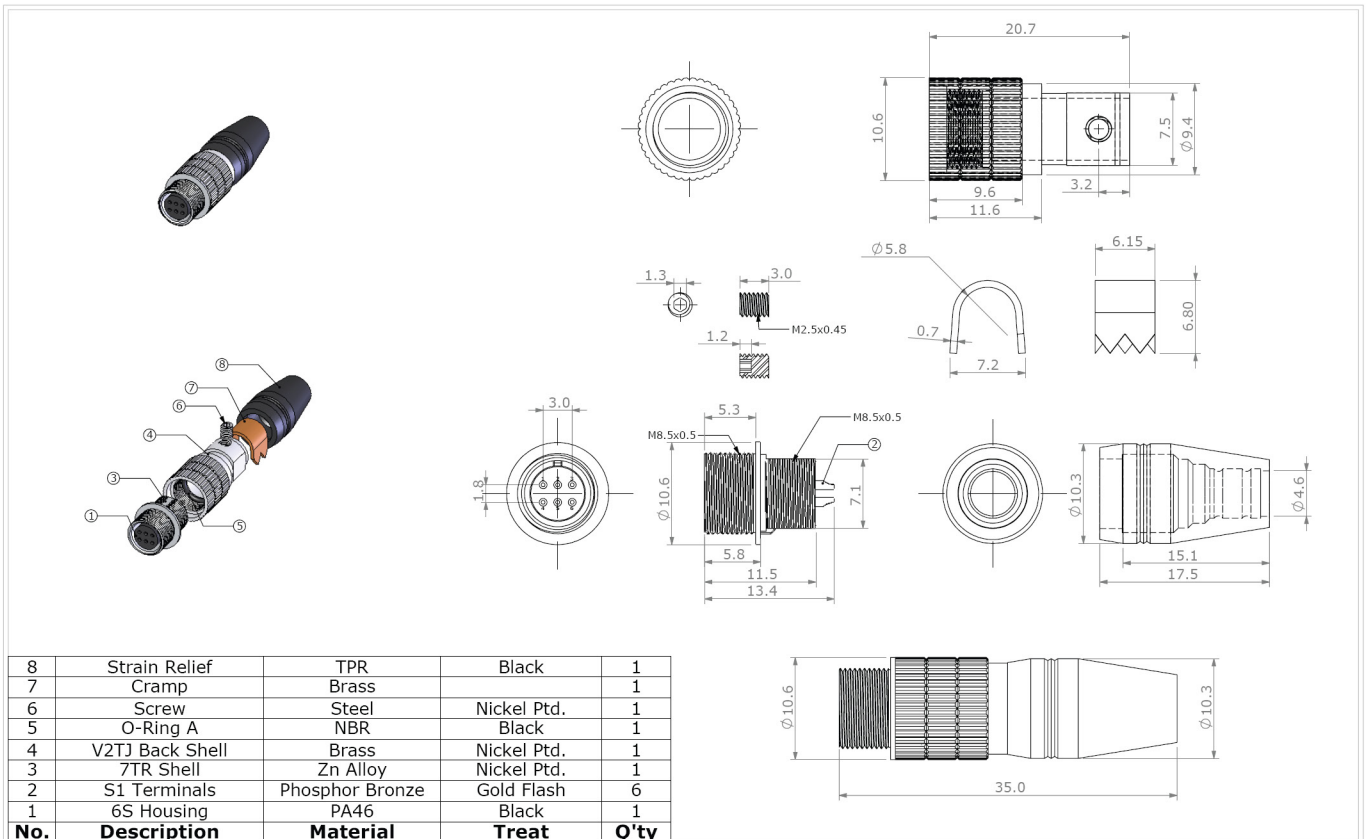

| 8 | Strain Relief | TPR | Black | 1 |
|-----|-----------------|-----------------|-------------|------|
| 7 | Cramp | Brass | | 1 |
| 6 | Screw | Steel | Nickel Ptd. | 1 |
| 5 | O-Ring A | NBR | Black | 1 |
| 4 | V2TJ Back Shell | Brass | Nickel Ptd. | 1 |
| 3 | 7TR Shell | Zn Alloy | Nickel Ptd. | 1 |
| 2 | S1 Terminals | Phosphor Bronze | Gold Flash | 6 |
| 1 | 6S Housing | PA46 | Black | 1 |
| No. | Description | Material | Treat | Q'ty |

| | | | | | | | | | | | |
|-------------------------------------|-----------------|----------------------------|----------------|---|------------------|--------------|---------------|--------------|-----------------|-----------------|------------------|
| 俞昌有限公司 YEU TSANG CO. LTD. | 品名: ITEM : | 6P H2XV V2TJ FEMALE | | Tolerance: .X +/-0.25 .XX +/-0.10 | SHEET: 1 1 | 單位: unit: | mm | 日期: date: | '12/05/15 | 繪圖: drwn by: | DanielShyr |
| | 料號: PART NO. | H2XV-V2TJ-06S | 圖號: DRW NO. | | | | 比例: scale: | 2:1 | 版本: version: | V. 1.0 | 核准: aprld by: |

COPYRIGHT BY YEU TSANG

| | |
|---------|------|
| Initial | Date |
|---------|------|

tolerance X: ±0.5 mm .X: ±0.25 mm .XX: ±0.10 mm
 applicable unless otherwise indicated in specification or on drawings