
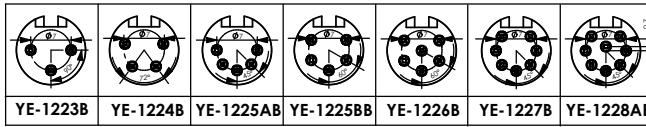
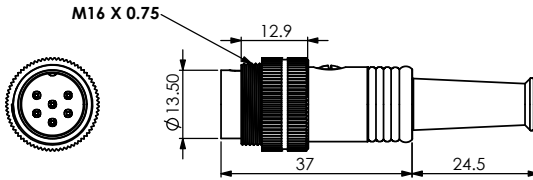


# YE-122XB DIN CABLE PLUG METAL SHIELD SCREW LOCKING ASS'Y

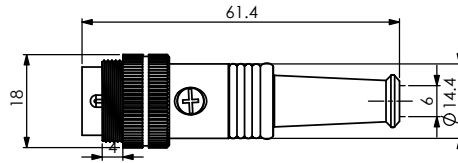

## MATERIAL :

1. SHIELD COVER : BRASS NICKEL PTD.
2. SCREW CAP : BRASS NICKEL PTD.
3. STRAIN BOOT : TPR
4. SET SCREW : STEEL NICKEL PTD.
5. "T" HOLDER : STEEL NICKEL PTD.
6. HOUSING : PA66
7. TERMINALS : BRASS SILVER PTD.

## SPECIFICATION :

Rating : 100V AC 1A max.

Contact Resistance :

Pins 30mΩ max.

Shell 50mΩ max.

Insulation Resistance :

100MΩ at 500V DC min.

Voltage Withstand :

250V AC for 1 minute



YE-1223B



YE-1224B



YE-1225AB



YE-1225BB



YE-1226B



YE-1227B



YE-1228AB