

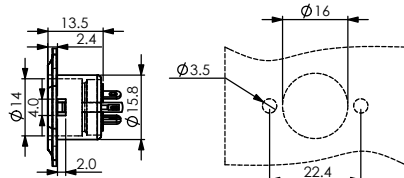


# YE-149X DIN SOCKET CHASSIS MOUNT PUSH LOCKING ASS'Y

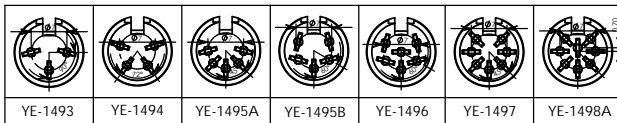

THROUGH HOLE DIMENSIONS

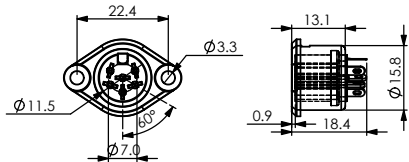

## MATERIAL :

1. SHIELD COVER : Zn ALLOY NICKEL PTD.
2. GND CONT. : COPPER NICKEL PTD.
3. HOUSING : PA66
4. TERMINALS : BRASS SILVER PTD.

## SPECIFICATION :

Rating : 100V AC 1A max.

Contact Resistance :

Pins 30mΩ max.

Shell 50mΩ max.

Insulation Resistance :

100MΩ at 500V DC min.

Voltage Withstand :

250V AC for 1 minute



YE-1493



YE-1494



YE-1495A



YE-1495B



YE-1496



YE-1497



YE-1498A