
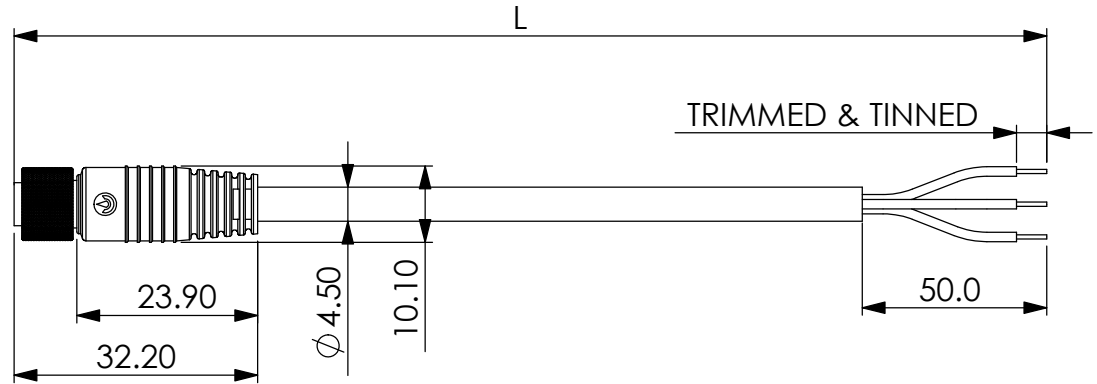



**Contact assignment :**

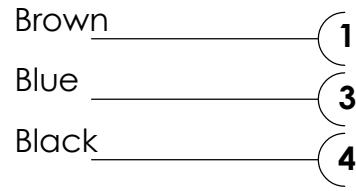

**TECHNICAL SPECIFICATION :**

- Connector locking system : screw M8x1.0
- Termination : solder
- Wire gauge : AWG 24
- Cable outlet : 4.5mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 20°C
- Rated voltage : 60V
- Rated current(40°C) : 4A
- Contact resistance : ≤ 3mΩ

**MATERIALS :**

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PVC




Part No.	Description	Length : L	Cable
CWP1203JMR-V02	-	2M	PVC , Black 3 x AWG24
-	-	-	
CWP1203JMR-V05	-	5M	PVC , Black 3 x AWG24
-	-	-	



**俞昌有限公司**  
*Yeu Tsang Co. Ltd.*

品名: ITEM :	<b>WATER PROOF CABLE ASS'Y M8 3P JACK PVC CABLE</b>		
料號: PART NO.	圖號: DRW NO.		



一般公差  
.X +/-0.25  
.XX +/-0.10

SHEET:  
1  
1

單位:  
unit: mm  
比例:  
scale: 1:1

日期:  
date: '08/01/23  
版本:  
version: V. 1.0

繪圖:  
drwn by: DanielShyr  
核准:  
aprld by: SkyShyr