

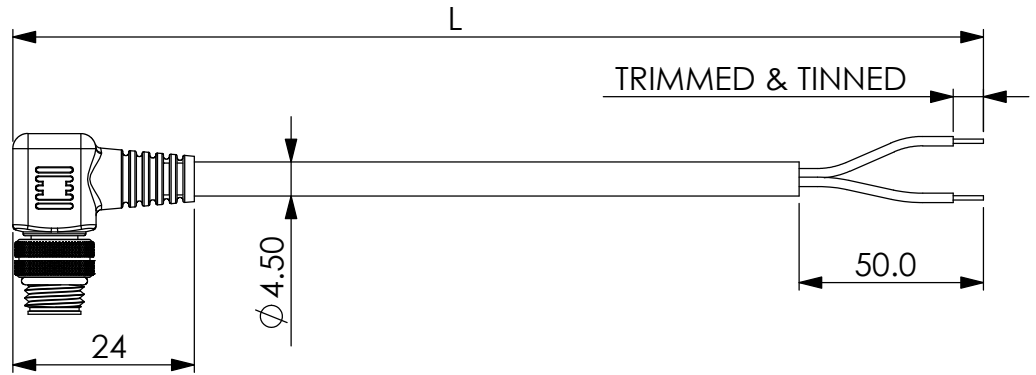


Contact assignment :

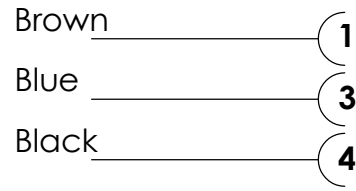

TECHNICAL SPECIFICATION :

Connector locking system : screw M8x1.0
 Termination : solder
 Wire gauge : AWG 24
 Cable outlet : 4.5mm
 Degree of protection : IP67, in mated condition
 Mechanical operation : > 100 mating cycles
 Upper temperature : +80°C
 lower temperature : - 20°C
 Rated voltage : 60V
 Rated current(40°C) : 4A
 Contact resistance : ≤ 3mΩ

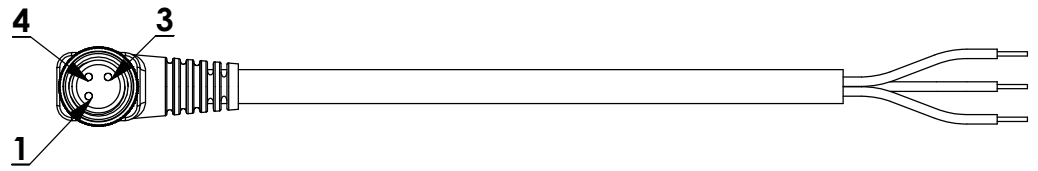

MATERIALS :

Contact : Brass
 Contact plating : Nickel 50μ / Gold 10μ
 Housing : PBT + 30% GF.
 Coupling nut : Brass , Nickel plated
 Moulding body : PU



Part No.	Description	Length : L	Cable
CWP1203PMR-RAU02	-	2M	PU , Black 3 x AWG24
-	-	-	
CWP1203PMR-RAU05	-	5M	PU , Black 3 x AWG24
-	-	-	




俞昌有限公司
Yeu Tsang Co. Ltd.

品名:
ITEM : **WATER PROOF CABLE ASS'Y
M8 3P R/A PLUG PU CABLE**

料號:
PART NO.

圖號:
DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1/1

單位:
unit: mm
比例:
scale: 1:1

日期:
date: '08/01/23
版本:
version: V. 1.0

繪圖:
drwn by: DanielShyr
核准:
aprld by: SkyShyr