

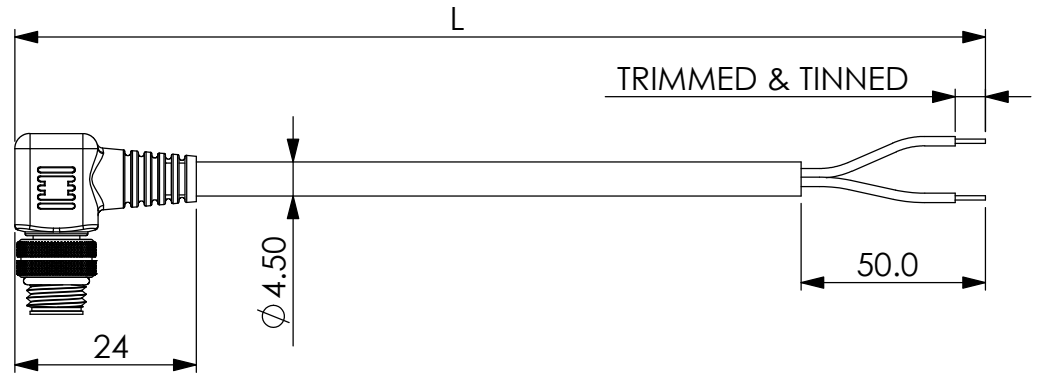


Contact assignment :

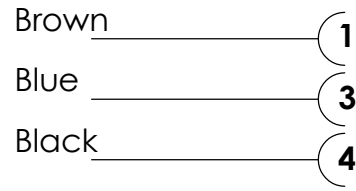

TECHNICAL SPECIFICATION :

Connector locking system : screw M8x1.0
 Termination : solder
 Wire gauge : AWG 24
 Cable outlet : 4.5mm
 Degree of protection : IP67, in mated condition
 Mechanical operation : > 100 mating cycles
 Upper temperature : +80°C
 lower temperature : - 20°C
 Rated voltage : 60V
 Rated current(40°C) : 4A
 Contact resistance : ≤ 3mΩ

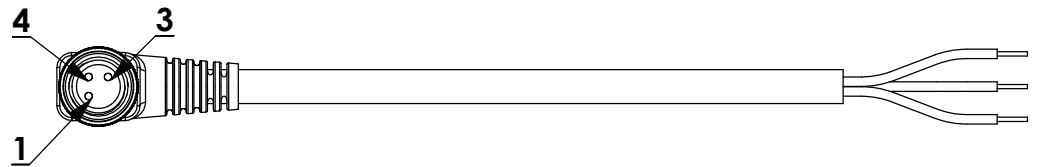

MATERIALS :

Contact : Brass
 Contact plating : Nickel 50μ / Gold 10μ
 Housing : PBT + 30% GF.
 Coupling nut : Brass , Nickel plated
 Moulding body : PVC




Part No.	Description	Length : L	Cable
CWP1203PMR-RAV02	-	2M	PVC , Black 3 x AWG24
-	-	-	
CWP1203PMR-RAV05	-	5M	
-	-	-	



俞昌有限公司
Yeu Tsang Co. Ltd.

品名: **WATER PROOF CABLE ASS'Y**
 ITEM : **M8 3P R/A PLUG PVC CABLE**
 料號: PART NO.
 圖號: DRW NO.



一般公差
 .X +/-0.25
 .XX +/-0.10

SHEET:
 1
 1

單位: mm
 unit: mm
 比例: 1:1
 scale: 1:1

日期: '08/01/23
 date: '08/01/23
 版本: V. 1.0
 version: V. 1.0

繪圖: DanielShyr
 drwn by: DanielShyr
 核准: SkyShyr
 aprvd by: SkyShyr