
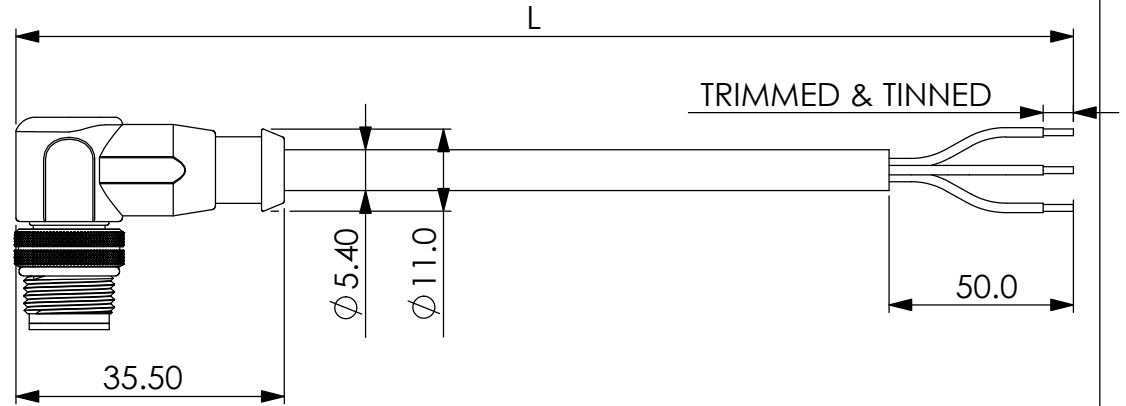


Contact assignment :

- Brown ————— 1
- white ————— 2
- Blue ————— 3
- Black ————— 4



TECHNICAL SPECIFICATION :

- Connector locking system : screw M12x1.0
- Termination : solder
- Wire gauge : AWG 22
- Cable outlet : 5.4mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 250V
- Rated current(40°C) : 4A
- Contact resistance : ≤ 3mΩ

MATERIALS :

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU



Part No.	Description	Length : L	Cable
CWP1204PMR-RA02	-	2M	PU , Black 4 x AWG22
CWP1204PMR-RA03	-	3M	
CWP1204PMR-RA05	-	5M	
CWP1204PMR-RA10	-	10M	




俞昌有限公司
Yeu Tsang Co. Ltd.

品名:
ITEM :
料號:
PART NO.

**WATER PROOF CABLE ASS'Y
M12 4P R/A PLUG PU CABLE**

圖號:
DRW NO.



一般公差
.X +/-0.25
.XX +/-0.10

SHEET:
1
1

單位:
unit:
比例:
scale:

mm
1 : 1

日期:
date:
版本:
version:

'08/01/23
V. 1.0

繪圖:
drwn by:
核准:
aprld by:

DanielShyr
SkyShyr