
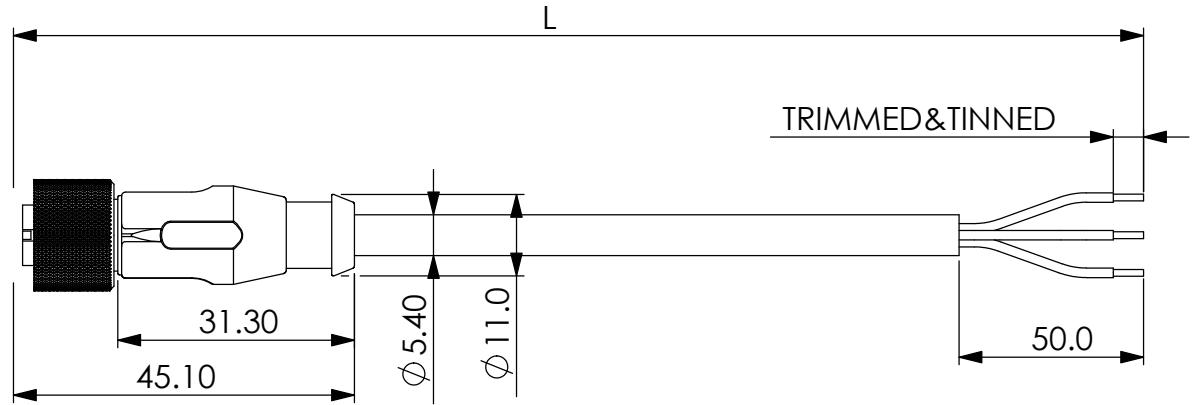


**Contact assignment :**

- Brown ———— ①
- White ———— ②
- Blue ———— ③
- Black ———— ④



**TECHNICAL SPECIFICATION :**





- Connector locking system : screw M12x1.0
- Termination : solder
- Wire gauge : AWG 22
- Cable outlet : 5.4mm
- Degree of protection : IP67, in mated condition
- Mechanical operation : > 100 mating cycles
- Upper temperature : +80°C
- lower temperature : - 25°C
- Rated voltage : 250V
- Rated current(40°C) : 4A
- Contact resistance : ≤ 3mΩ

**MATERIALS :**

- Contact : Brass
- Contact plating : Nickel 50μ / Gold 10μ
- Housing : PBT + 30% GF.
- Coupling nut : Brass , Nickel plated
- Moulding body : PU



Part No.	Description	Length : L	Cable
CWP1204JMR-02	-	2M	PU , Black 4 x AWG22
CWP1204JMR-03	-	3M	
CWP1204JMR-05	-	5M	
CWP1204JMR-10	-	10M	

 <b>俞昌有限公司</b> <i>Yeu Tsang Co. Ltd.</i>	品名: ITEM :	<b>WATER PROOF CABLE ASS'Y M12 4P JACK PU CABLE</b>		 	一般公差 .X +/-0.25 .XX +/-0.10	SHEET: 	單位: unit:	mm	日期: date:	'08/01/23	繪圖: drwn by:	DanielShyr
	料號: PART NO.	圖號: DRW NO.				比例: scale:	1 : 1	版本: version:	V. 1.0	核准: aprld by:	SkyShyr	