
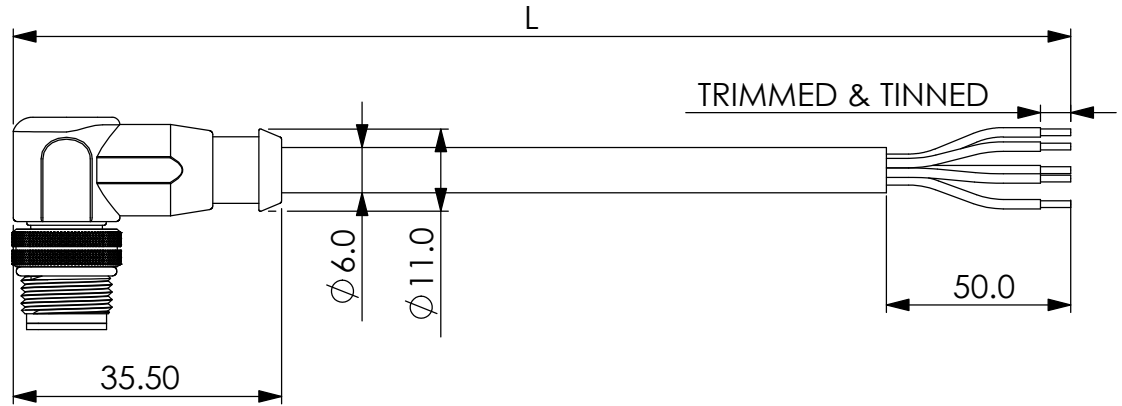


**Contact assignment :**

- White \_\_\_\_\_ ①
- Brown \_\_\_\_\_ ②
- Green \_\_\_\_\_ ③
- Yellow \_\_\_\_\_ ④
- Grey \_\_\_\_\_ ⑤
- Pink \_\_\_\_\_ ⑥
- Blue \_\_\_\_\_ ⑦
- Red \_\_\_\_\_ ⑧



**TECHNICAL SPECIFICATION :**

Connector locking system : screw M12x1.0  
 Termination : solder  
 Wire gauge : AWG 24  
 Cable outlet : 6.0mm  
 Degree of protection : IP67, in mated condition  
 Mechanical operation : > 100 mating cycles  
 Upper temperature : +80°C  
 lower temperature : - 25°C  
 Rated voltage : 30V  
 Rated current(40°C) : 2A  
 Contact resistance : ≤3mΩ

**MATERIALS :**

Contact : Brass  
 Contact plating : Nickel 50μ / Gold 10μ  
 Housing : PBT + 30% GF.  
 Coupling nut : Brass , Nickel plated  
 Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1208PMR-RA02	-	2M	PU , Black 8 x AWG24
CWP1208PMR-RA03	-	3M	
CWP1208PMR-RA05	-	5M	
CWP1208PMR-RA10	-	10M	



**俞昌有限公司**  
*Yeu Tsang Co. Ltd.*

品名: ITEM :	<b>WATER PROOF CABLE ASS'Y M12 8P R/A PLUG PU CABLE</b>	
料號: PART NO.	圖號: DRW NO.	



一般公差	SHEET:	單位: unit:	mm	日期: date:	'08/01/23	繪圖: drwn by:	DanielShyr
.X +/-0.25 .XX +/-0.10	1 1	比例: scale:	1 : 1	版本: version:	V. 1.0	核准: aprld by:	SkyShyr