
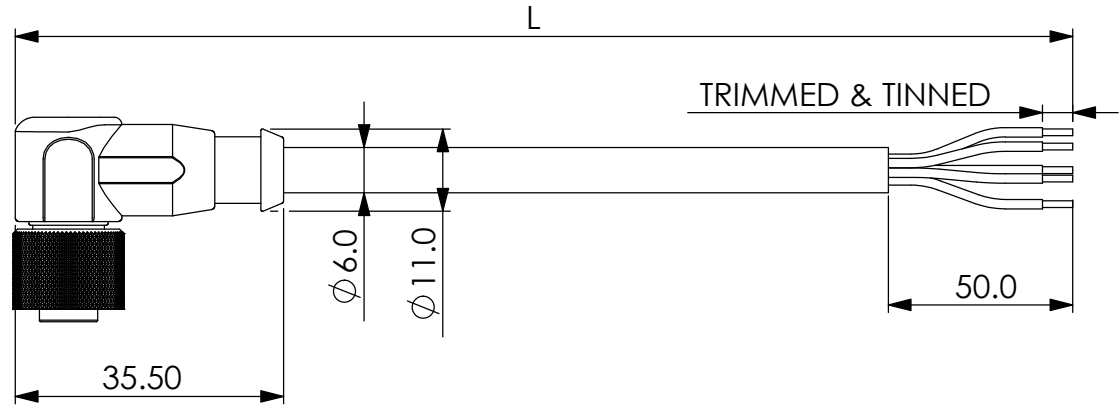


Contact assignment :

- White _____ ①
- Brown _____ ②
- Green _____ ③
- Yellow _____ ④
- Grey _____ ⑤
- Pink _____ ⑥
- Blue _____ ⑦
- Red _____ ⑧



TECHNICAL SPECIFICATION :

Connector locking system : screw M12x1.0
 Termination : solder
 Wire gauge : AWG 24
 Cable outlet : 6.0mm
 Degree of protection : IP67, in mated condition
 Mechanical operation : > 100 mating cycles
 Upper temperature : +80°C
 lower temperature : - 25°C
 Rated voltage : 30V
 Rated current(40°C) : 2A
 Contact resistance : ≤3mΩ

MATERIALS :

Contact : Brass
 Contact plating : Nickel 50μ / Gold 10μ
 Housing : PBT + 30% GF.
 Coupling nut : Brass , Nickel plated
 Moulding body : PU




Part No.	Description	Length : L	Cable
CWP1208JMR-RA02	-	2M	PU , Black 8 x AWG24
CWP1208JMR-RA03	-	3M	
CWP1208JMR-RA05	-	5M	
CWP1208JMR-RA10	-	10M	



俞昌有限公司
Yeu Tsang Co., Ltd.

品名: ITEM :	WATER PROOF CABLE ASS'Y M12 8P R/A JACK PU CABLE	
料號: PART NO.	圖號: DRW NO.	



一般公差	SHEET:	單位: unit:	mm	日期: date:	'08/01/23	繪圖: drwn by:	DanielShyr
.X +/-0.25 .XX +/-0.10	1 1	比例: scale:	1 : 1	版本: version:	V. 1.0	核准: aprVld by:	SkyShyr