

Your Solution for overhead install and repair !




Spec / Model	PL-500	PL-650	PL-800	PL-950
Voltage	220V	220V	220V	220V
Lifting height	500 CM	650 CM	800 CM	950 CM
Working height	700 CM	850 CM	1000 CM	1150 CM
Machine height	198 CM	198 CM	198 CM	198 CM
Load Capacity	130 KG	130 KG	130 KG	110 KG
Basic size	118 X 77 CM	118 X 77 CM	118 X 77 CM	125 X 77 CM
Platform size	60 X 66 CM	60 X 66 CM	60 X 66 CM	60 X 66 CM
Platform height	120 CM	120 CM	120 CM	120 CM
Machine weight	297 KG	320 KG	344 KG	385 KG



KSF Passenger Lifter is perfect for installation / repair of:

- ◆ Hospital
- ◆ School
- ◆ Warehouse
- ◆ Temple
- ◆ Hotel
- ◆ Airport
- ◆ Shopping mall
- ◆ Factory
- ◆ Construction
- ◆ Auditorium

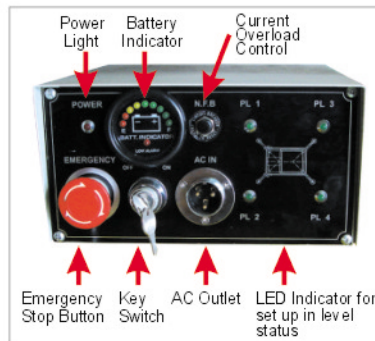

User friendly Ground Control:
Including a low battery indicator, locking key switch, emergency stop button, LED indicator for level and dual-activated up/down switch.

Platform Control:

- ◆ Emergency Stop Button
- ◆ Dual-Activated up/down switch
- ◆ Receptacle on the Platform for convenient use of power tools.

1. All **new hydraulic system with double chain** for anti-drop guarantee.
2. Made of heavy duty of aluminum alloy, compact and stable.
3. **User Friendly Ground control:**
 - A. **LED indicator** for legs proper engage inside with base.
 - B. LED indicator for set up in level status.
 - C. **Key switch** equipped avoid unauthorized use.
 - D. **Manually lowering** the platform in case of power failure is equipped.
 - E. Raising the platform from the ground control is available.
 - F. **Emergency stop button** is equipped.
 - G. **Low battery indicator** is equipped.
4. **Platform control:**
 - A. **Emergency Stop Button.**
 - B. **Dual-Activated Up / Down Switch.**
 - C. **Receptacle** on the platform for convenient use of power tools.
5. **Base design for fork lift used**, easy for transportation.