


先使用命令提示字元輸入 IPCONFIG

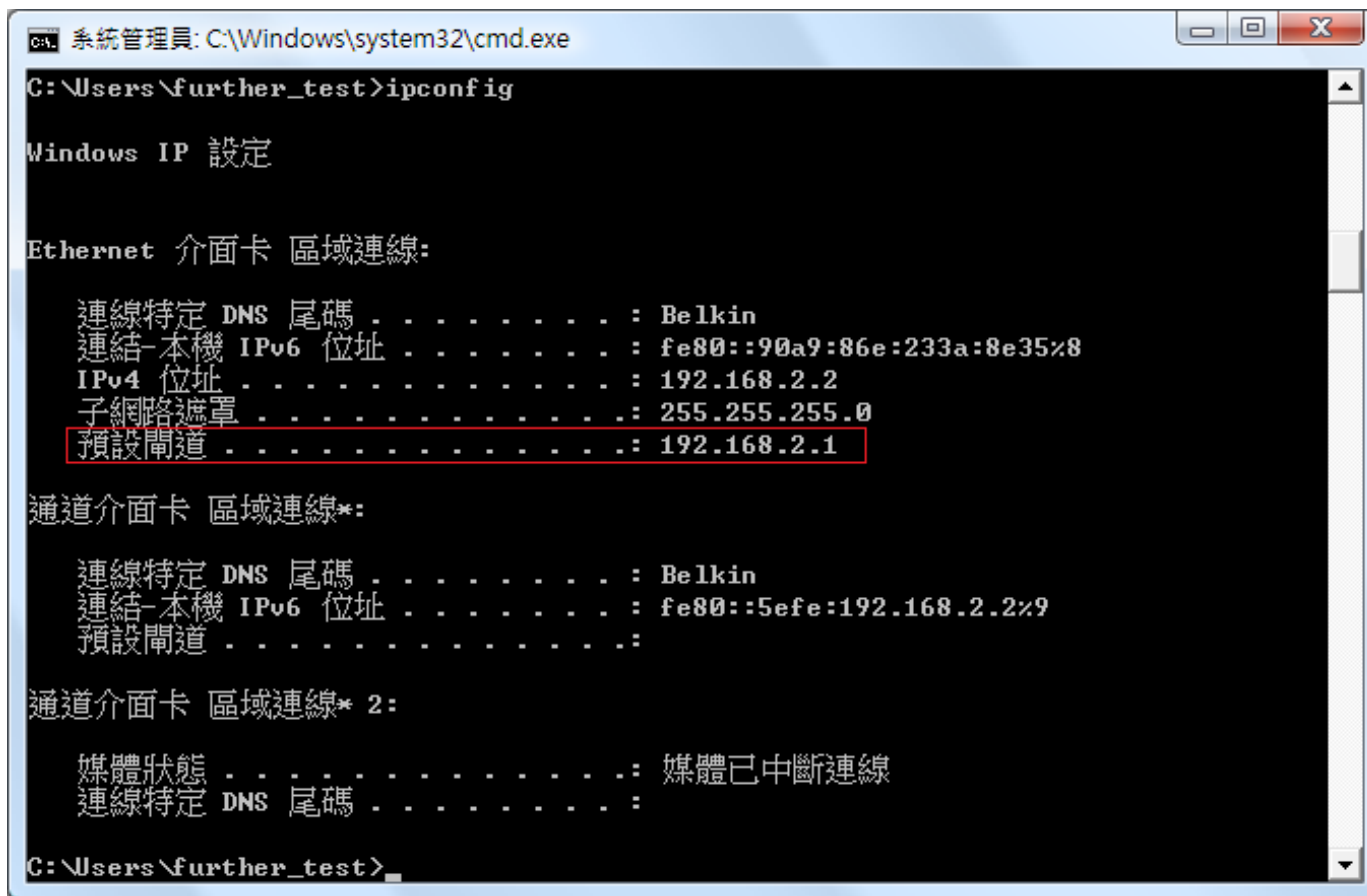

```
系統管理員: C:\Windows\system32\cmd.exe
C:\Users\further_test>ipconfig

Windows IP 設定

Ethernet 介面卡 區域連線:

    連線特定 DNS 尾碼 . . . . . : Belkin
    連結-本機 IPv6 位址 . . . . . : fe80::90a9:86e:233a:8e35%8
    IPv4 位址 . . . . . : 192.168.2.2
    子網路遮罩 . . . . . : 255.255.255.0
    預設閘道 . . . . . : 192.168.2.1

通道介面卡 區域連線*:

    連線特定 DNS 尾碼 . . . . . : Belkin
    連結-本機 IPv6 位址 . . . . . : fe80::5efe:192.168.2.2%9
    預設閘道 . . . . . :


通道介面卡 區域連線* 2:

    媒體狀態 . . . . . : 媒體已中斷連線
    連線特定 DNS 尾碼 . . . . . :

C:\Users\further_test>
```

開啓 IE 將找到的閘道位址輸入 192.168.2.1

設定 UPnP -> Utilitise -> System Settings -> UPNP Enable

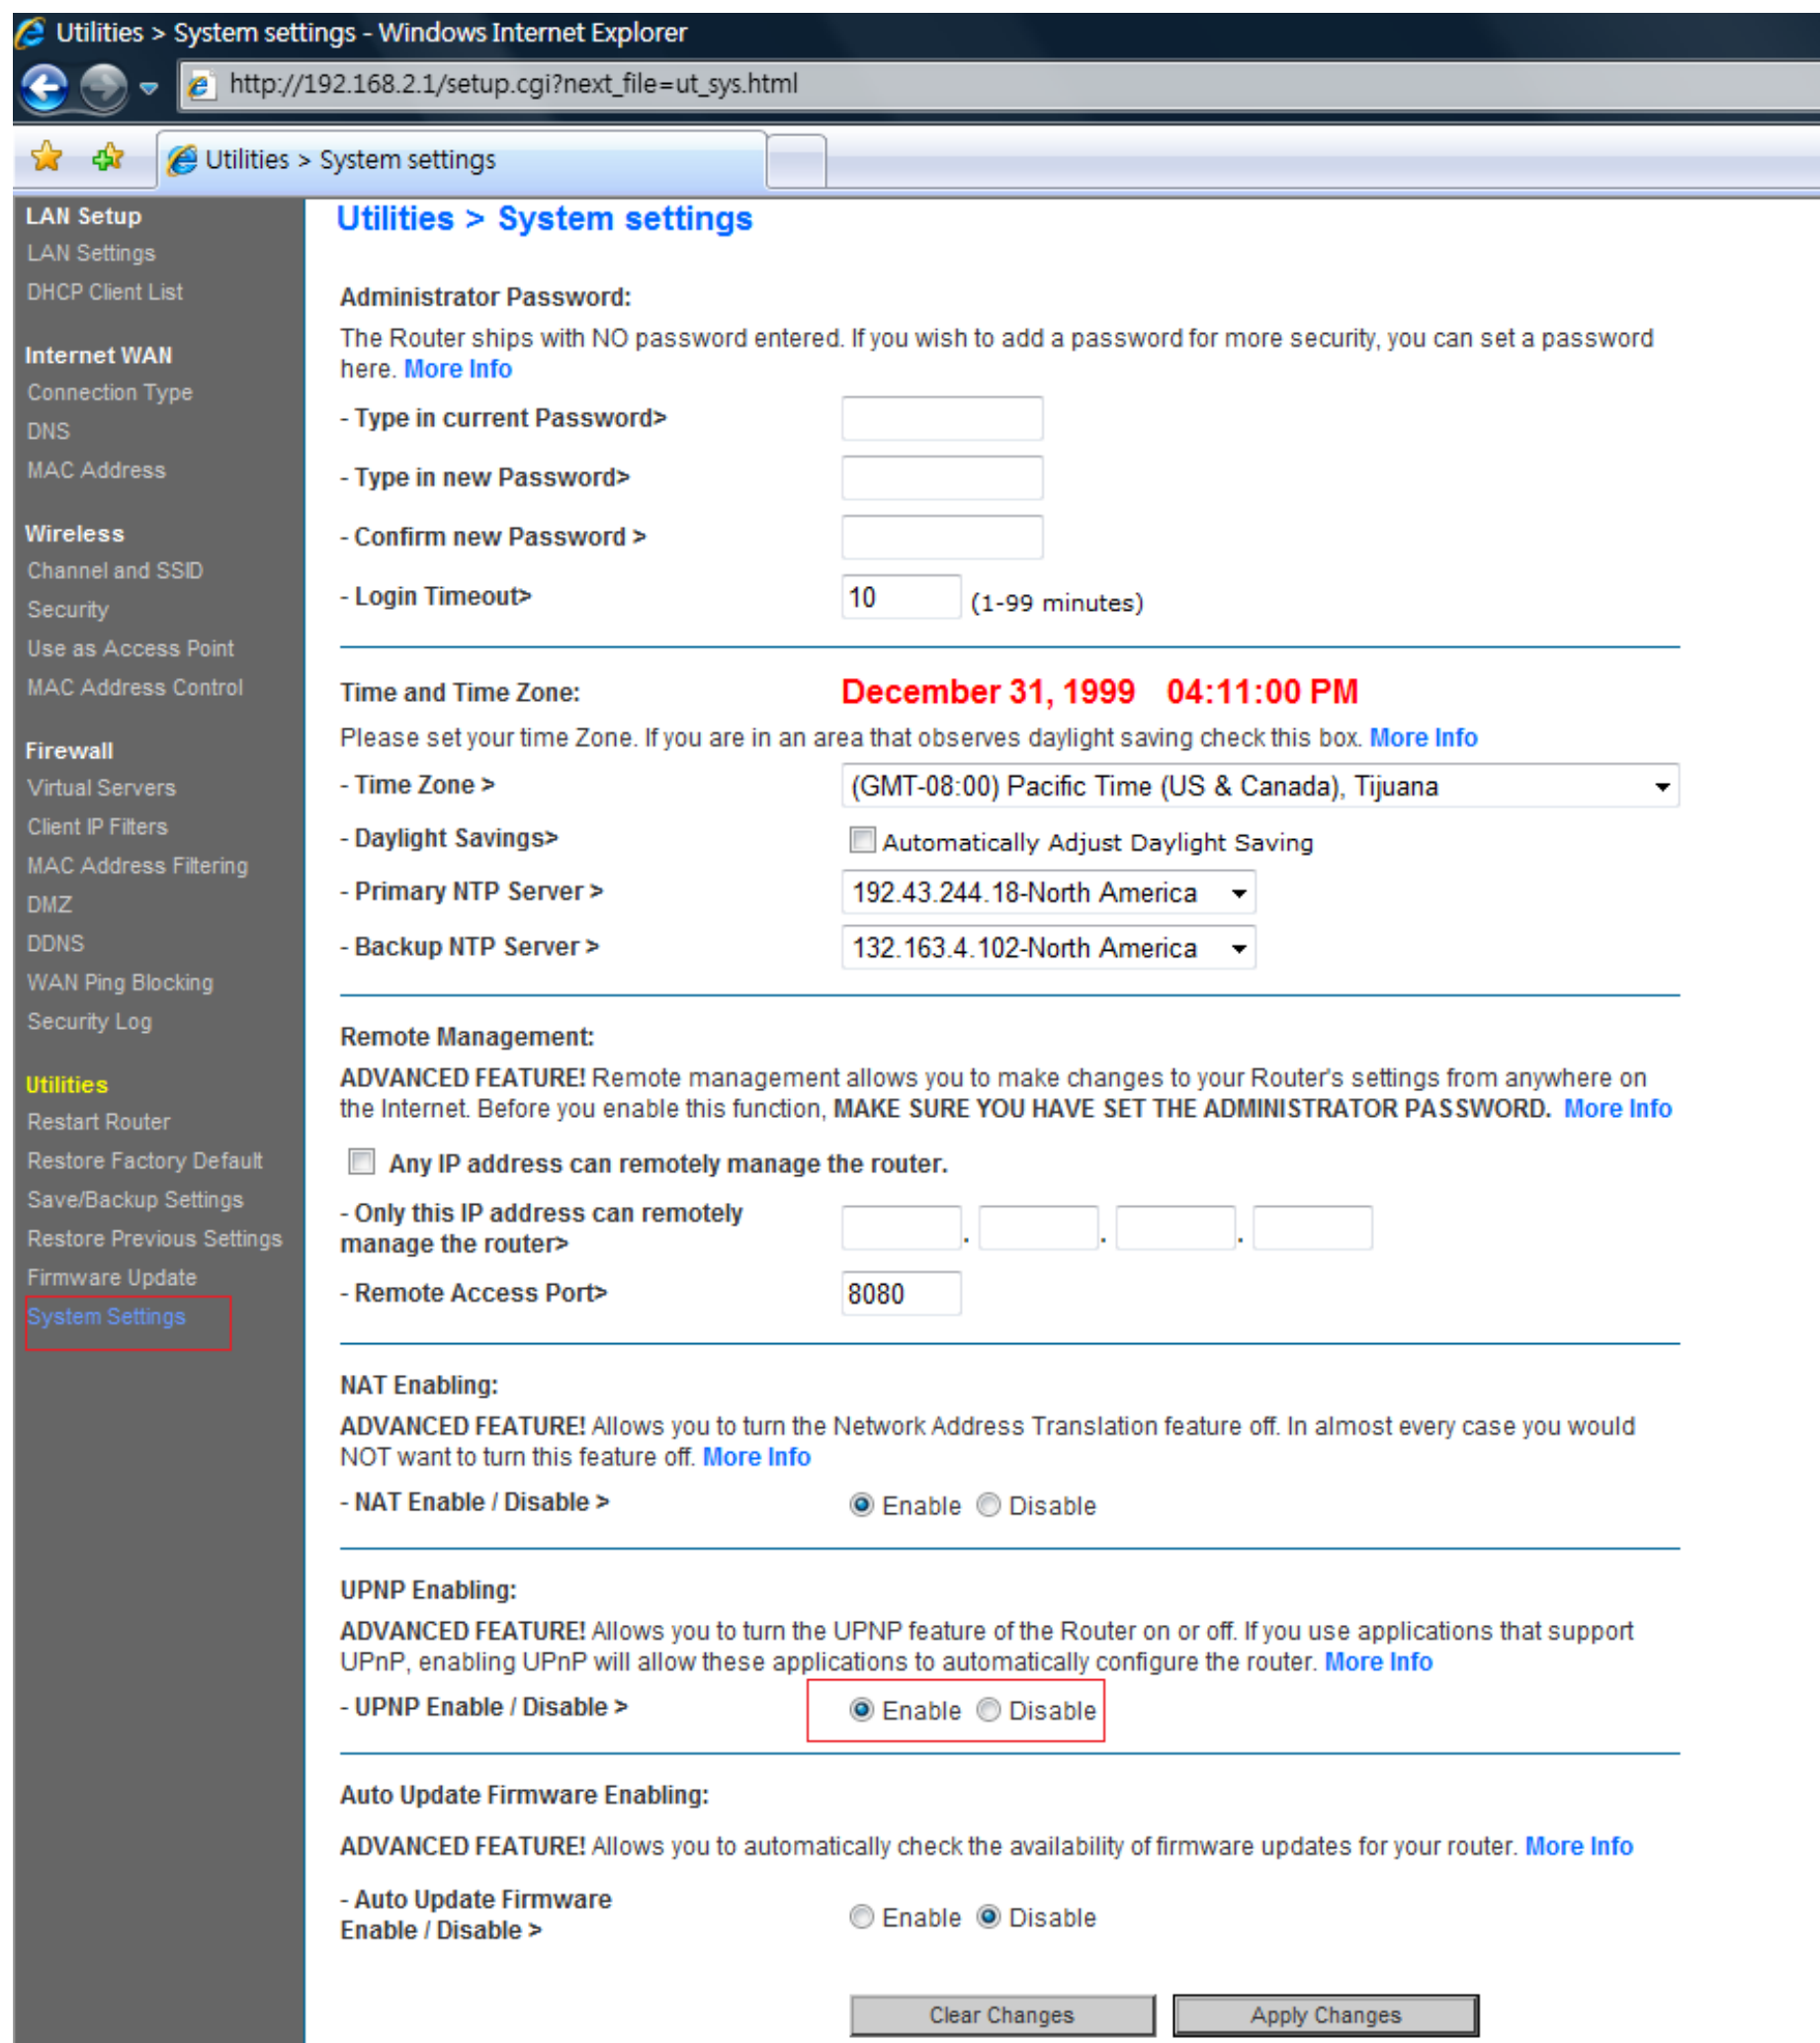

設定完成後將 IP 分享器重新啓動並移除 netTV BOX 電源

待 IP 分享器啓動完成在接上 netTV BOX 的電源

設定 DMZ Firewall -> DMZ -> 輸入 IP 位址 -> Enable

BELKIN Router Setup

Home | Help | Logout Internet Status: **Connected**

- LAN Setup
 - LAN Settings
 - DHCP Client List
- Internet WAN
 - Connection Type
 - DNS
 - MAC Address
- Wireless
 - Channel and SSID
 - Security
 - Use as Access Point
 - MAC Address Control
- Firewall
 - Virtual Servers
 - Client IP Filters
 - MAC Address Filtering
 - DMZ**
 - DDNS
 - WAN Ping Blocking
 - Security Log
- Utilities
 - Restart Router
 - Restore Factory Default
 - Save/Backup Settings
 - Restore Previous Settings
 - Firmware Update
 - System Settings

Firewall > DMZ

DMZ
The DMZ feature allows you to specify one computer on your network to be placed outside of the NAT firewall. This may be necessary if the NAT feature is causing problems with an application such as a game or video conferencing application. Use this feature on a temporary basis. **The computer in the DMZ is not protected from hacker attacks.** To put a computer in the DMZ, enter the last digits of its IP address in the field below and select "Enable". Click "Submit" for the change to take effect. [More Info](#)

IP Address of Virtual DMZ Host >

	Static IP	Private IP	Enable
1.	60.251.140.6	192.168.2. <input type="text" value="3"/>	<input checked="" type="checkbox"/>

IP 位址查詢 -> DHCP Client List

BELKIN | Router Setup

Home | Help | Logout | Internet Status: **Conn**

LAN Setup
LAN Settings
DHCP Client List

Internet WAN
Connection Type
DNS
MAC Address

Wireless
Channel and SSID
Security
Use as Access Point
MAC Address Control

Firewall
Virtual Servers
Client IP Filters
MAC Address Filtering
DMZ
DDNS
WAN Ping Blocking
Security Log

Utilities
Restart Router
Restore Factory Default
Save/Backup Settings
Restore Previous Settings
Firmware Update
System Settings

LAN > DHCP Client List

This page shows you the IP address, Host Name and MAC address of each computer that is connecte your network. If the computer does not have a host name specified, then the Host Name field will be bl: Pressing "Refresh" will update the list.

IP Address	Host Name	MAC Address
192.168.2.2	further_test-PC	00:14:85:2A:FF:49
192.168.2.3	IP-Tvbox	00:1E:53:60:04:41

Refresh