


**BLIND RIVET NUT-WATERPROOF
FLAT HEAD RIVET NUT, CLOSED END/ BEM, BAI SERIES**

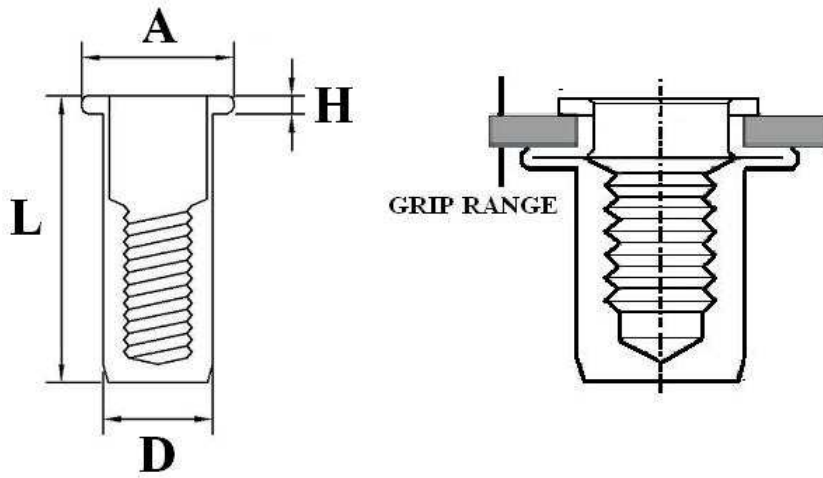

THREAD SIZE	PART NO.	HOLE SIZE +0.1 / -0.0	D(mm) +0.0 / -0.1	L(mm) ±0.4	A(mm) ±0.3	H(mm) +0.15/-0.05	GRIP RANGE
M4X0.7	BEM4-C/BEM4(K)-C	6.1	6.0	16.60	9.0	0.8	0.5-2.5
M5X0.8	BEM5-C/BEM5(K)-C	7.1	7.0	17.50	10.0	1.0	0.5-2.5
M6X1.0	BEM6-C/BEM6(K)-C	9.1	9.0	22.40	13.0	1.5	1.0-3.5
M8X1.25	BEM8-C/BEM8(K)-C	11.1	11.0	27.00	14.5	1.5	1.0-4.0
M10X1.5	BEM10-C/BEM10(K)-C	13.1	13.0	31.20	16.0	1.6	1.0-4.0

*K SERIES ARE NEW KNURLED ITEMS.

THREAD SIZE	PART NO.	HOLE SIZE +0.004/-0.0	D(inch) +0.0/-0.004	L(inch) ±0.015	A(inch) ±0.012	H(inch) +0.006/-0.002	GRIP RANGE
UNC 6-32 UNC 8-32	SAI4-632-C/SAI4-632(K)-C SAI4-832-C/SAI4-832(K)-C	0.253	0.249	0.59	0.289	0.02	0.02-0.10
UNC 10-24 UNC 10-32	SAI5-1024-C/SAI5-1024(K)-C SAI5-1032-C/SAI5-1032(K)-C	0.284	0.280	0.80	0.320	0.02	0.02-0.10
UNC 1/4-20	SAI6-C/SAI6(K)-C	0.378	0.374	0.92	0.414	0.02	0.04-0.15
UNC 5/16-18	SAI8-C/SAI8(K)-C	0.420	0.414	0.93	0.456	0.02	0.04-0.15
UNC 3/8-16	SAI10-C/SAI10(K)-C	0.504	0.500	1.11	0.540	0.02	0.04-0.15

NOTE: K= KNURLED BODY